


# Cell Type CR17450HE-N Specifications

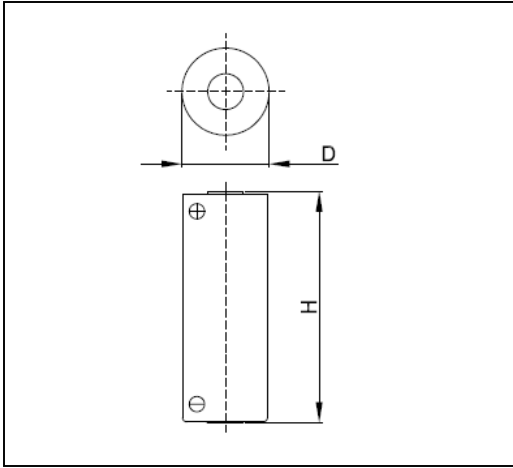

|                                                 |              |           |
|-------------------------------------------------|--------------|-----------|
| Nominal Voltage (V)                             |              | 3         |
| Nominal Capacity (mAh) <sup>*1</sup>            |              | 1700      |
| Standard Discharge Current (mA)                 |              | 14        |
| Max. Pulse Discharge Current (mA) <sup>*2</sup> |              | 5000      |
| Operating Temperature Range (°C) <sup>*3</sup>  |              | -40 ~ +85 |
| Dimensions (mm)                                 | Diameter (D) | 17.0      |
|                                                 | Height (H)   | 45.0      |
| Approx. Weight (g)                              |              | 23        |

\*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

\*2 Current value for obtaining 1.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth (50% of the nominal capacity) at 23°C.

\*3 Consult with FDK when using batteries at temperatures exceeding -20°C to +60°C range.


**Note) Battery Handling Precautions**

English) [http://www.fdk.com/battery/lithium\\_e/handling\\_precaution.html](http://www.fdk.com/battery/lithium_e/handling_precaution.html)


Japanese) [http://www.fdk.co.jp/battery/lithium/handling\\_precaution.html](http://www.fdk.co.jp/battery/lithium/handling_precaution.html)

## Typical Characteristics


### Temperature Discharge Characteristics

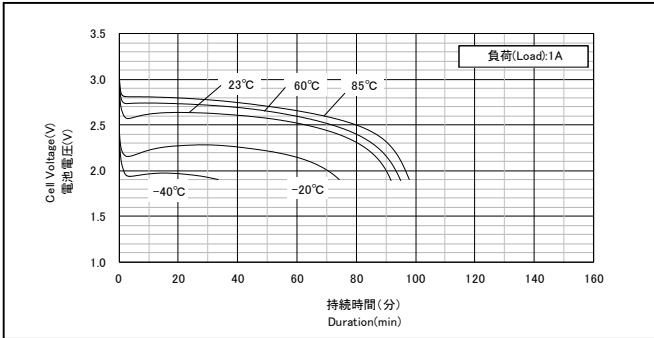


### Temperature Discharge Characteristics

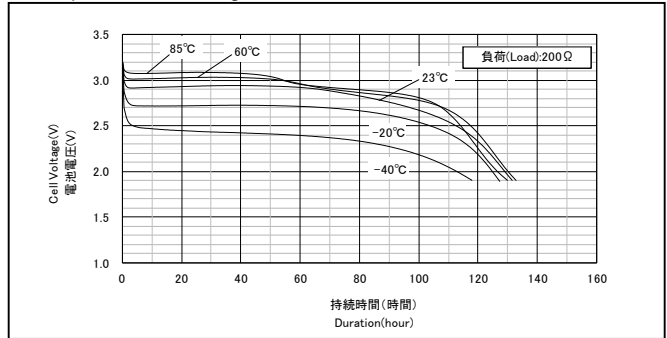


### Temperature Discharge Characteristics

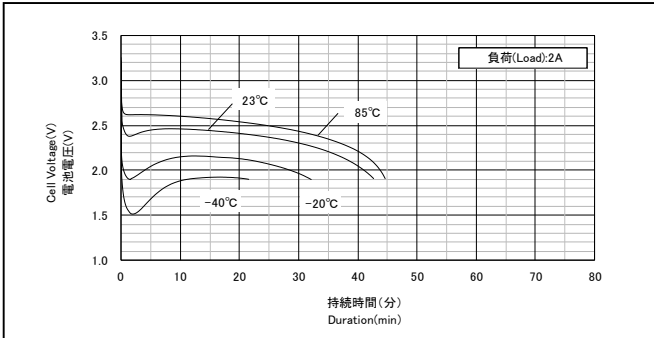

### Discharge Characteristics after Storage

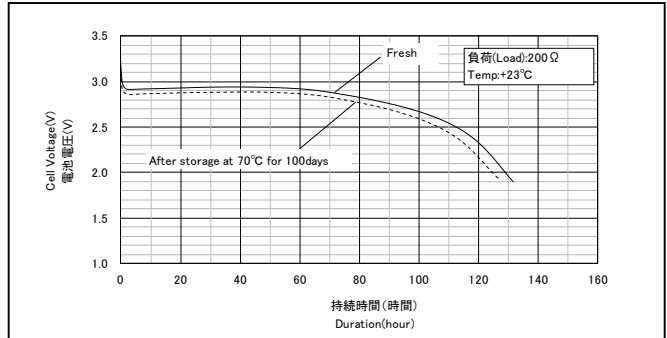

### Discharge Load vs. Capacity

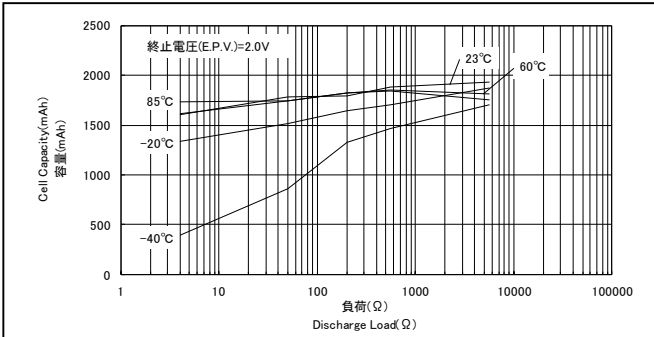

### Discharge Load vs. Operating Voltage

