


Cell Type CR6·L Specifications

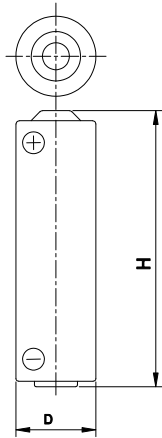


Nominal Voltage (V)		3
Nominal Capacity (mAh) *1		2300
Standard Discharge Current (mA)		0.1
Operating Temperature Range (°C) *2		-40 ~ +85
Max. Dimensions (mm)	Diameter (D)	14.5
	Height (H)	50.5
Weight (g)		17

*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.


*2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.

Typical Characteristics(Estimated Curve)


Temperature Characteristics of CR6·L

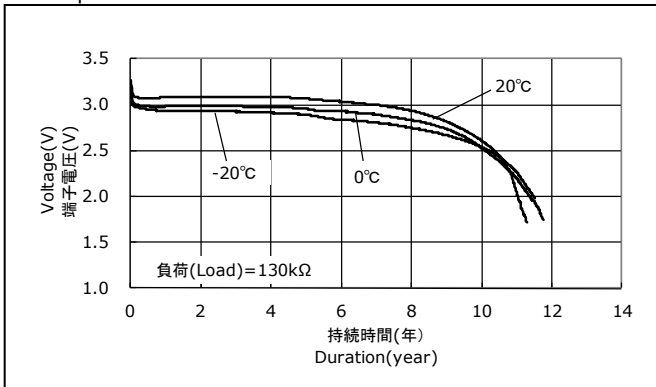


Temperature Characteristics of CR6·L

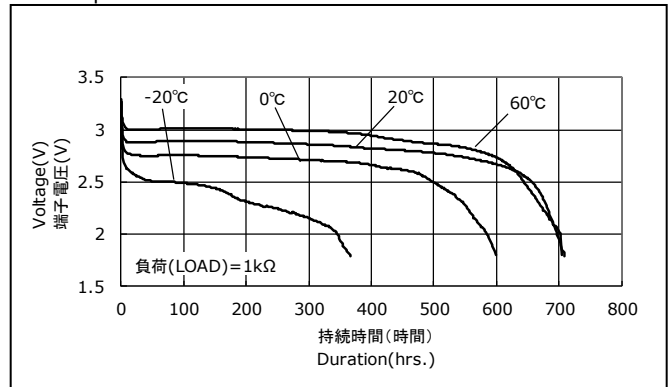

Pulse discharge Characteristics of CR6·L

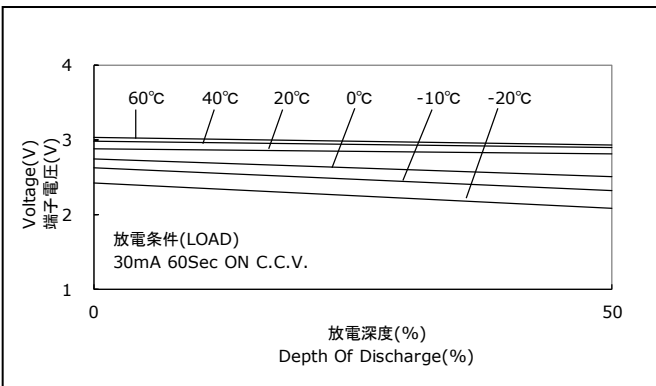

Discharge Load vs. Cell Capacity of CR6·L

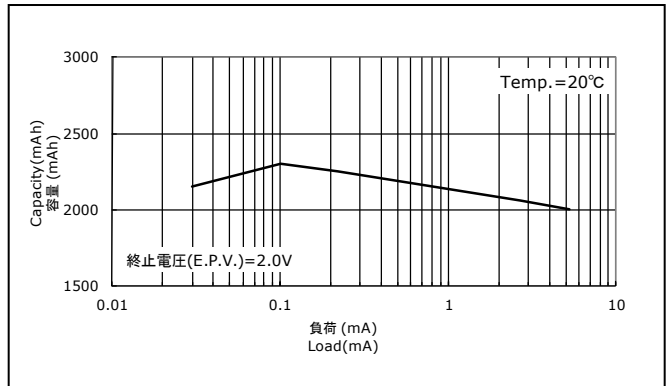

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.